




LNG167A  
Ebony




LNG311N  
Light Titanium



LNG313N  
Dark Titanium

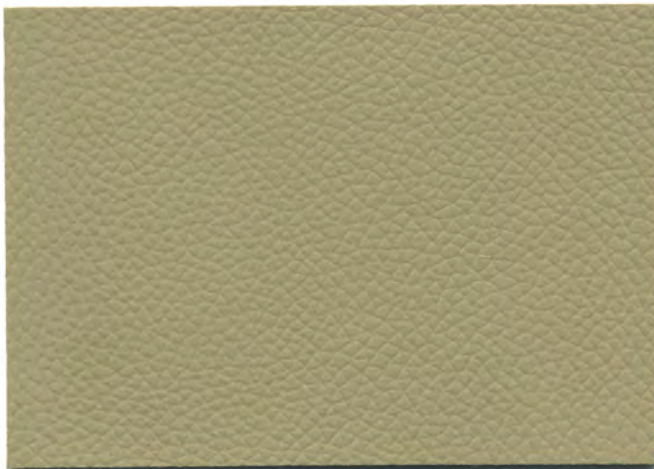

LNG830K  
Light Cashmere

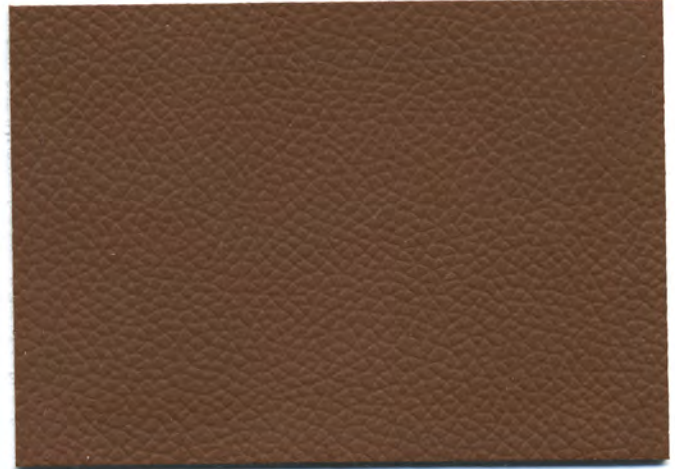

LNG260M  
Morocco



## Specifications:

Enduralex with Produratex A top finish and featuring Eduratex™ Q1 backing.

Width:	54"
Roll Size:	30 yards
Nominal Weight:	30 oz. per .lin yard
Contents:	100% virgin vinyl
Cold Crack:	-10° F
UV Stabilized Pigments:	300 hour minimum
Abrasion:	Heavy Duty - Wyzenbeek
Class Rating:	ASTM D-3690-Class A
Thickness:	Approximately 1.02mm
Heat Sealable:	Yes

Compatible with commercially available adhesives.

## Meets flammability requirements\*:

- Motor Vehicle Safety Standard 302
- California Technical Bulletin 117 Section E

*\* This term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual conditions.*

## Cleaning Instructions:

This product should be cleaned with mild soap and water. Do not use alcohol based cleaners.



CGPGs a certified  
QS-9000/ISO9002  
Manufacturer

**CFFA** CHEMICAL FABRICS & FILM  
ASSOCIATION INC.

