


Marine Flooring




NA541 - 54"
NA721 - 72"
Dark Blue

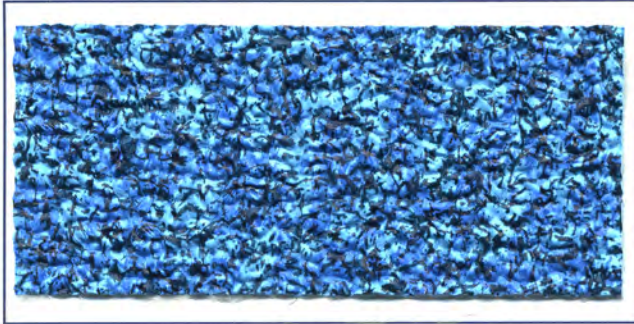


NA542 - 54"
NA722 - 72"
Natural



NA723 - 72"
Black



NA544 - 54"
NA724 - 72"
Sandstone



NA545 - 54"
NA725 - 72"
Storm Gray



NA546 - 54"
NA726 - 72"
Shark

Underlining - 54"



CU3
Almond



CU1
Black




CU2
Light Gray



CU4
White

Marine Decking - 54"

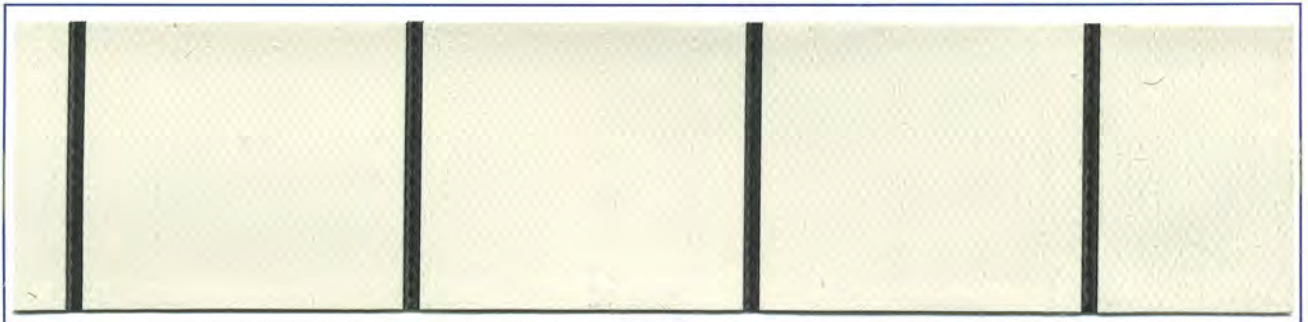

NA200
White Plank

Marine Flooring

Width:	54" / 72"
Weight:	36 / 51 oz per linear yard
Abrasion Resistance:	6,000 Wyzenbeek stainless steel screen wire
Mildew Resistance:	ASTM G-21
U.V. Resistance:	650 hours
Flame Retardant Rating:	California Tech Bulletin #117, Sec E UFAC Fabric, Class 1

Results reported pursuant to the above standards do not necessarily characterize the hazards presented by this material under actual fire conditions.

Application: Outdoor

Underlining

Width:	54"
Weight:	8 oz per linear yard
Abrasion Resistance:	10,000 Wyzenbeek stainless steel screen wire
Mildew Resistance:	ASTM G-21
U.V. Resistance:	650 hours
Application:	Outdoor

Marine Decking

Width:	54"
Weight:	27 oz per linear yard
Abrasion Resistance:	3,000 Wyzenbeek stainless steel screen wire
Mildew Resistance:	ASTM G-21
U.V. Resistance:	650 hours
Flame Retardant Rating:	California Tech Bulletin #117, Sec E UFAC Fabric, Class 1

Results reported pursuant to the above standards do not necessarily characterize the hazards presented by this material under actual fire conditions.

Application: Outdoor