

OXEN


ENDURATEX AUTOMOTIVE VINYL COLLECTION




FL-4853
WHITE




FL-4561
BONE

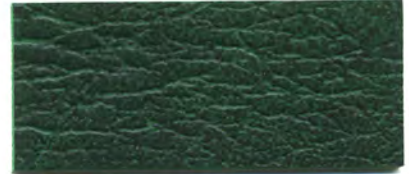


FL-4564
DK. GREEN

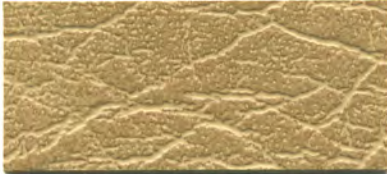


FL-0803
LT. BUCKSKIN

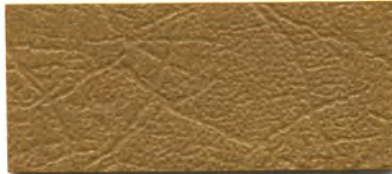

FL-5205
CAMEL

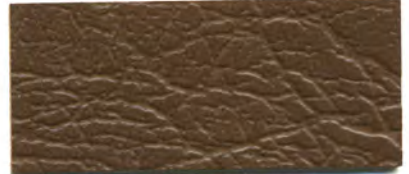

FL-4567
DK. BROWN

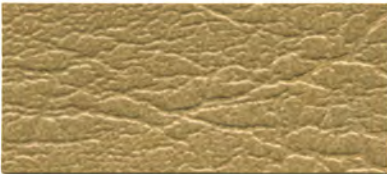

FL-4957
DK. BUCKSKIN




FL-0802
BROWN




FL-5959
BRIAR BROWN




FL-4855
MET. SILVER

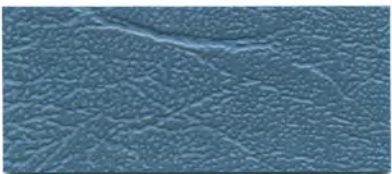


FL-4562
MED. BLUE

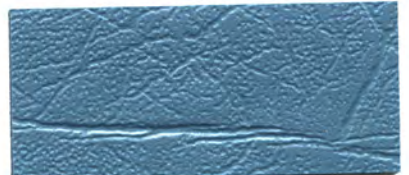

FL-0815
MET. BLUE

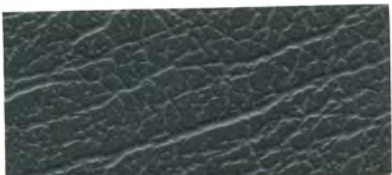

FL-5962
CHAR GRAY

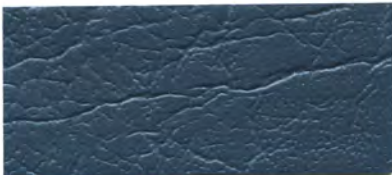


FL-4857
MET. MED. BLUE



FL-4563
DK. BLUE



FL-4568
MAROON

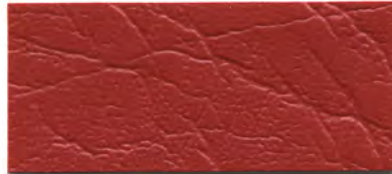

FL-5620
RED



FL-5206
CARMINE



FL-4560
BLACK



MADE IN R.O.C.



ENDURATEXTM
INNOVATIVE VINYL S

WITH **Produritect**TM **A**
PROTECTIVE FINISH

with **Produritect**TM **A** is manufactured to meet the following typical properties*:

Width.....	54"
Roll Size.....	40 yards
Nominal Weight.....	32 oz. per lin. yard
Contents.....	100% Virgin Vinyl
Cold Crack.....	-10°F
UV Stabilized Pigments.....	300 hour minimum
Abrasion.....	Heavy Duty-Wyzenbeek
Class Ratings.....	ASTM D-3690 Class A
Thickness.....	Approximately 1.02 mm
Heat Sealable.....	Yes

Suitable Applications:

- RV/Automotive
- Office/General Seating
- Residential Seating
- General Sewn Products

Cleaning Instructions:

This product should be cleaned with mild soap and water. Do not use alcohol based cleaners.

ENDURATEXTM and **Produritect**TM **A** are trademarks of CGPC America, Corp. and may not be used without written permission of CGPC America, Corp.

Compatible with commercially available adhesives.

Meets flammability requirements*:

- Motor Vehicle Safety Standard 302
- California Technical Bulletin 117 Section E

*This term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual conditions.

