



PAT-8501 ADOBE WHITE    PAT-8503 PARCHMENT    PAT-8601 BUFF    PAT-8504 SAND    PAT-8602 OATMEAL




PAT-8603 LARK    PAT-8604 CONCRETE    PAT-8567 DOVE    PAT-8539 GUNMETAL    PAT-8605 CHARCOAL



PAT-8606 SAFFRON    PAT-8607 HARVEST    PAT-8608 OCHRE    PAT-8584 TAUPE    PAT-8516 CHESTNUT



PAT-8609 CORAL    PAT-8506 PUTTY    PAT-8610 SABLE    PAT-8611 TERRA COTTA    PAT-8517 MOCHA




PAT-8607 HARVEST    PAT-8561 MULBERRY    PAT-8536 BLUSH    PAT-8565 TEAROSE    PAT-8537 ROSE    PAT-8612 CHERRY




PAT-8613 ORANGE KIST    PAT-8528 AM. BEAUTY    PAT-8614 SALSA    PAT-8529 PAPRIKA    PAT-8532 BORDEAUX    PAT-8615 BERRY    PAT-8579 RUBY    PAT-8616 EGGPLANT



PAT-8617 AMETHYST    PAT-8576 DEEP PHOENICIAN    PAT-8618 AUBERGINE    PAT-8577 PURPLE GREY    PAT-8619 PLUM    PAT-8533 PORT    PAT-8569 BURGUNDY    PAT-8540 BLACK



PAT-8509 LEMON PEEL    PAT-8563 CHINA GREEN    PAT-8620 PEACOCK    PAT-8541 SPACE BLUE    PAT-8542 ROYAL    PAT-8621 BLUEBERRY    PAT-8564 GROTTA    PAT-8571 FOREST

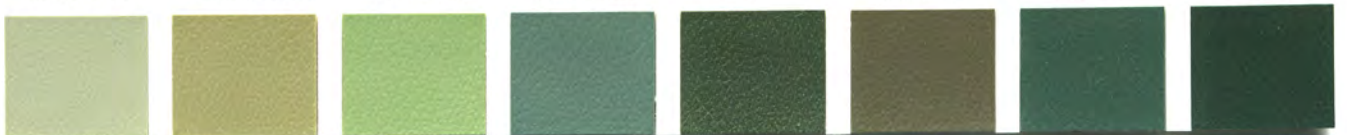

PAT-8622 GRAY MOSS    PAT-8623 SAGE    PAT-8624 GRANNY SMITH    PAT-8560 AQUA GREY    PAT-8625 CYPRESS    PAT-8626 EUCALYPTUS    PAT-8627 PINE FOREST    PAT-8553 YEW GREEN



PAT-8628 SEA    PAT-8546 COLONIAL BLUE    PAT-8572 BLUERIDGE    PAT-8544 SAPPHIRE    PAT-8582 IMPERIAL BLUE    PAT-8547 MIDNIGHT BLUE    PAT-8629 LODEN    PAT-8581 DK. AQUA

**GENERAL CHARACTERISTICS**

- Practical, Durable
- Superior Strength
- 100% Vinyl Surface
- 100% Polyester Substrate

**MANUFACTURED TO MEET THE FOLLOWING CODES\***

- BIFMA
- Boston Fire Code - Test BFD IX -1
- California Tech Bulletin 117
- Federal Aviation Specification FAR 25.853 (a) & Appendix F Part I (a) (1) (ii)
- Federal Specification A-A-2950 - A
- Motor Vehicle Safety Standard 302
- Port Authorities of New York & New Jersey
- UFAC - Class 1
- IMO A.652(16) 8.2 & 8.3

\*This term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Our vinyls, when tested with suitable component materials, may comply with California Tech Bulletin 133 and Boston Fire Code - Test BFD IX - 10.

**FINISHES & TREATMENTS**

• **PERMABLOK<sup>3</sup>**<sup>®</sup>  
ADVANCED VINYL PROTECTION

- Antimicrobial/Antibacterial Protection
- Antistain Finish/Easily Cleaned
- Superior Abrasion Resistance  
400,000 Cycles - Wyzenbeek/CFFA-1  
(Federal Standard 191A - Method 5304)
- Antistatic Slip Finish
- Cold Crack - 20° F (-28.9 C)
- Heat Sealable
- Mildew Resistant Backing and Face
- Oil Resistant
- Sulfide Stain Resistant/All Colors
- UV Stabilized Pigments

**SUITABLE APPLICATIONS**

- Contract Interiors
- Office
- Restaurant
- Hotel/Motel
- Healthcare
- Sunroom/Patio
- Marine/RV/Auto
- Residential

**SPECIFICS**

- Width 54" (137 cm)
- Roll 30 yd (27.43 m)
- Weight 34 oz (770 gm/m<sup>2</sup>)



**PERMABLOK<sup>3</sup>**<sup>®</sup>  
ADVANCED VINYL PROTECTION

**CARE AND CLEANING GUIDE**

Staining Agent	Cleaning Procedure
Eye Shadow/Mascara	Step 1
Grease	Step 1
Crayon	Step 1
Black Felt Tip Pen	Step 1
Chocolate	Step 1
Suntan Lotion	Step 1
Red Lipstick	Step 2
Blood, Urine, Feces	Step 3
Oil Base Paint, Tar, Asphalt	Step 3
Other Tough Stains	Step 4 or 5

**Step 1:** Remove excess spill with damp cloth. Clean with 1:1 mix of Ivory<sup>®</sup> liquid and water. Rinse with clean water and dry.

**Step 2:** Use straight application of concentrated cleaners such as Formula 409<sup>®</sup> or Fantastik<sup>®</sup> Spray Cleaner. Then wipe with clean cloth.

**Step 3:** Use a 1:1 mix of ammonia and water or a 1:4 mix of bleach and water. Rinse with clean water and dry.

**Step 4:** Use straight application of naphtha (lighter fluid). Rinse thoroughly with clean water and pat surface dry.

**Step 5:** Use 1:1 mix of isopropyl alcohol and water. If stain persists, use straight alcohol. Rinse thoroughly with clean water and pat surface dry.

**Note:** For cleaning that requires steps 4 or 5 - use a soft cotton cloth saturated with the cleaning material, rub the stain in circles 10 times. Pat dry with another soft cotton cloth and check results.

The information published in this care guide refers to the performance of Permablok 3<sup>®</sup> products in specific tests conducted under laboratory conditions. Results may vary under actual conditions.

This information is not a guarantee and does not relieve the user from the responsibility of the proper and safe use of the product and all cleaning agents. The use of certain agents can be harmful to the surface appearance and lifespan of vinyl. Spradling, its agents and assigns assume no responsibility resulting from the use of such cleaning agents to the vinyl.

Formula 409<sup>®</sup> is a trademark of the Clorox Company.  
Fantastik<sup>™</sup> is a trademark of DowBrands, Inc.  
Trademark of the Dow Chemical Company.  
Ivory<sup>®</sup> is a trademark of Procter and Gamble.  
Permablok 3<sup>®</sup> is a trademark of Spradling International, Inc.  
©1997 Spradling International, Inc.

\*Check compatibility when using this product in combination with painted or varnished surfaces.

**SOUTH CORPORATE OFFICES**

Pelham, Alabama

**SOUTHWEST**

Dallas, Texas

**WEST**

Buena Park, California

**EAST**

Delran, New Jersey

**EUROPE**

Neckarsulm, Germany



MADE EXCLUSIVELY FOR SPRADLING INTERNATIONAL INC. BY PROQUINAL S.A., COLOMBIA - AN ISO 9001, 9002, QS 9000 COMPANY

To place orders or make inquiries call 1-800-333-0955 • fax 1-205-985-2354 or 1-205-985-9176  
e-mail • sales@spradlingvinyl.com / web site • www.spradlingvinyl.com